



We've got your cables all wrapped up ...

AtkoreTM
Flexicon

Retrofit Convenience Pack Offer



- 5m Divisible Conduit 20mm
- 4 x Hinged Fittings M20
- 4 x Hinged Locknuts M20



- The ultimate in convenience
- Simplistic Ordering
- One part number for conduit & fittings

- Easy Storage
- Ready to use



Nylon PA6 Pack

NEW

STANDARD
LOW FIRE
HAZARD
★

IP40

Part Number: **FPADS-CP21BX5**

- Temperature range -40°C to +120°C
- Halogen, sulphur and phosphorus free
- Highly resistant to solvents & oils
- Self extinguishing
- UV resistant

Polypropylene Pack

NEW

IP40

Part Number: **FPPDS-CP21BX5**

- Temperature range -20°C to +90°C
- Self extinguishing
- Acid resistant

Additional Hinged Fittings

Part Number: **FDF21-M20B** (Pack of 10)



- 10 Hinged fittings M20
- 10 Hinged Locknuts M20
- Suitable for all Flexicon divisible slit conduit and standard corrugated conduits



Email us to receive your free sample flexiconsales@atkore.com



BS EN IEC 61386





Divisible Slit Conduit for Retrofit applications



Atkore™ Flexicon

Divisible Slit (Double Split) Flexible Conduit Ranges

- Made from 2 interlocking slit corrugated conduits
- Cables can be inserted laterally post installation
- IP40 Protection



Polypropylene	Nylon (PA6)	Extra LFH Nylon	FCL Clip
---------------	-------------	-----------------	----------

- Temperature range -20°C to +90°C
- Self extinguishing
- Acid resistant

- Temperature range -40°C to +120°C
- Self extinguishing
- Halogen, sulphur and phosphorus free
- UV resistant
- Highly resistant to solvents & oils
- Other colours available

- Highly flame retardant PA6
- Temperature range -40°C to +120°C
- Self extinguishing
- Halogen, sulphur and phosphorus free
- UV resistant
- EN-45545-2 HL3

- Temperature range -50°C to +135°C
- Self extinguishing
- Halogen, sulphur and phosphorus free
- UV resistant



Nominal (mm)	ID (mm)	OD (mm)	Bend Radius	Part Number	Reel Length	Bend Radius	Part Number	Reel Length	Bend Radius	Part Number	Reel Length	Part Number
11	6.2	11.5	70	FPPDS11	50	70	FPADS11	50	70	FPRDS11	50	
13	7.9	13.0	75	FPPDS13	50	75	FPADS13	50	75	FPRDS13	50	FCL13
16	10.3	15.8	100	FPPDS16	50	100	FPADS16	50	100	FPRDS16	50	FCL16
21	13.9	21.2	120	FPPDS21	50	120	FPADS21	50	120	FPRDS21	50	FCL21
28	20.5	28.5	170	FPPDS28	50	170	FPADS28	50	170	FPRDS28	50	FCL28
34	26.6	34.5	180	FPPDS34	25	180	FPADS34	25	180	FPRDS34	25	FCL34
42	32.0	42.5	200	FPPDS42	25	200	FPADS42	25	200	FPRDS42	25	FCL42
54	43.0	54.5	240	FPPDS54	25	240	FPADS54	25	240	FPRDS54	25	FCL54


Fittings



Part Number: FDF21-M20B - 21mm M20 Thread

Other Colours

- Orange
- Blue
- Red
- Grey
- Colour Combinations - Ideal for identifying different circuits
- Subject to MOQ

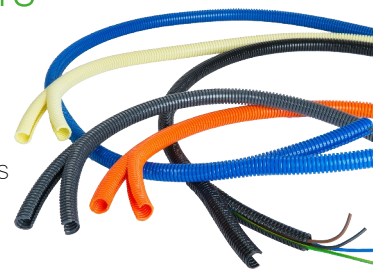

BS EN IEC 61386

